

# maran

Moisture-proof luminaire

Simply efficient

**REGIOLUX**



**FACT SHEET**

- Compact IP65 luminaire
- Through wiring
- Multiwatt driver
- Efficiency: 153 lm/W
- Captive stainless steel clips
- Restraint cables for installation



IP65

**Mounting/installation:**

- Surface-mounted ceiling/wall installation
- Pendant mounting

**Housing:**

- Housing made of polycarbonate
- Diffuser clips made of stainless steel

**maran lighting technology:**

- Opal diffuser, polycarbonate
- Direct/indirect light beam distribution

Light source


LED 50,000h L70B10

- CRI ≥ 80 / 4000K


**Switching:**

- Electronic Multiwatt driver
- 230V 50Hz


maran	Configuration	lm/W	P <sub>sys</sub>	Ballast	Art. no.	kg
maran-DV/1200	LED 4800-3500 840	150	23	ETM 3-stage	5013 2404 115	1.6
maran-DV/1500	LED 6200-3900 840	153	26	ETM 4-stage	5013 5404 115	1.9



Restraint cables for installation



Through wiring included

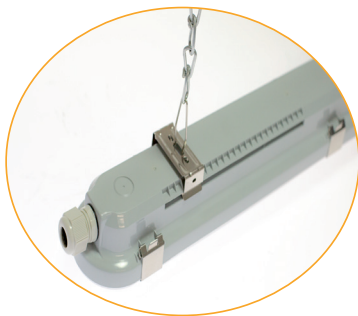

Fastening clips and suspension bracket included in the scope of delivery.



DIP switch




**Multiwatt driver**

maran DV/1500 in comparison (LED,T5,T8)  
4 adjustable luminous fluxes

Stage 1	3900lm	~	T5 1/35W + 1/49W	~	T8 1/36W
Stage 2	4800lm	~	T5 1/49W + 1/54W	~	T8 1/36W + 1/58W
Stage 3	5400lm	~	T5 1/54W + 2/35W	~	T8 1/58W + 2/36W
Stage 4	6200lm	~	T5 1/80W + 2/49W	~	T8 1/58W + 2/36W

Dimensions	LxWxH	A1
maran/1200	1240 x 85 x 78	850
maran/1500	1540 x 85 x 78	1150

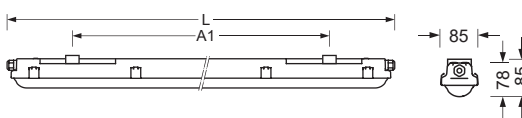

Regiolux vcard



**REGIOLUX**

Regiolux GmbH  
Hellinger Straße 3  
D-97486 Königsberg  
Tel. +49 9525 89 0  
info@regiolux.de  
www.regiolux.de

